

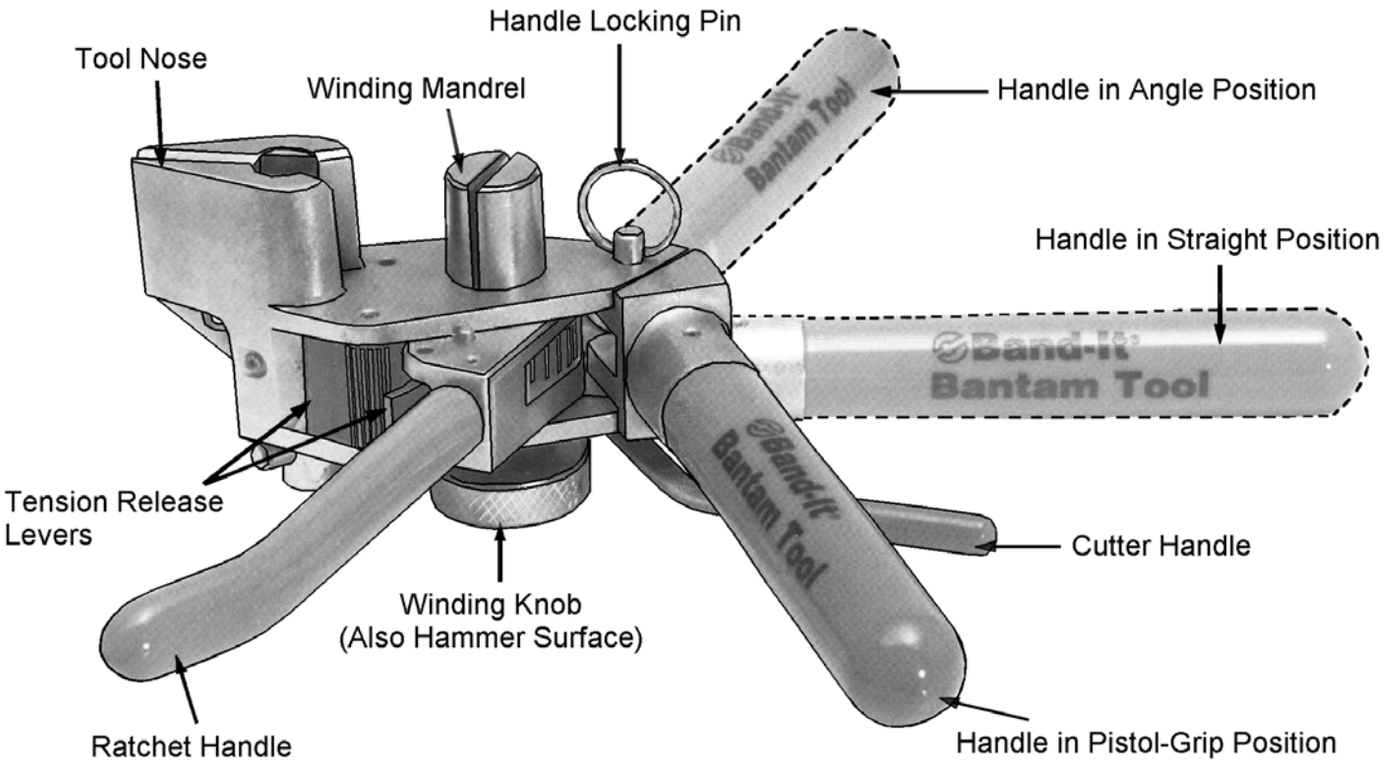



Pistol Grip Position

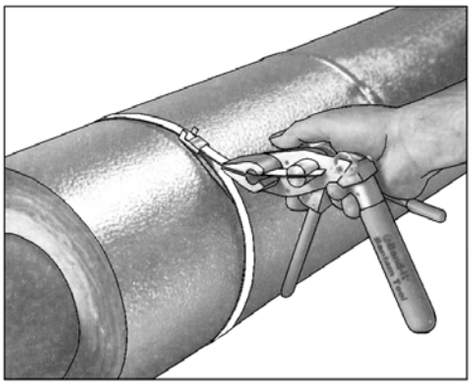

1. With the Bantam Tool in the pistol grip postion, place the band in the nose of the tool and with sufficient band in the winding mandrel.

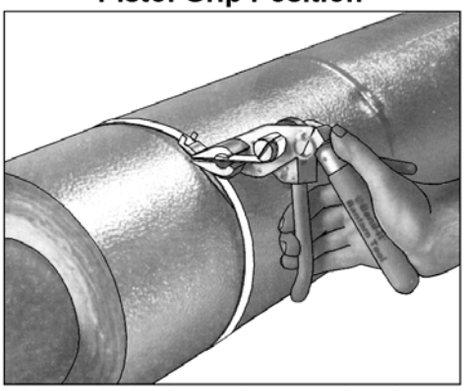


2. With ratcheting action, tension the band until clamp is tight. If necessary, band may be reposition by releasing tension with levers.

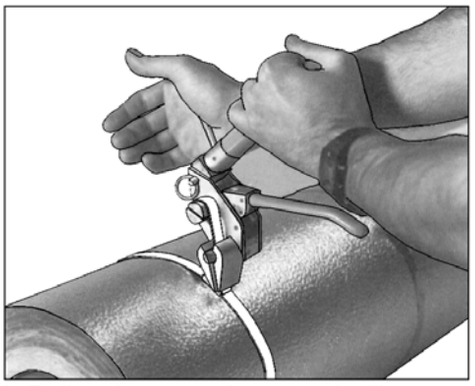


3. Roll tool over as far as tool will go, and push forward cutter handle. Remove tool and tap down ears of clip to complete clamp. Remove excess material from winding mandrel.


Straight or Angle Position

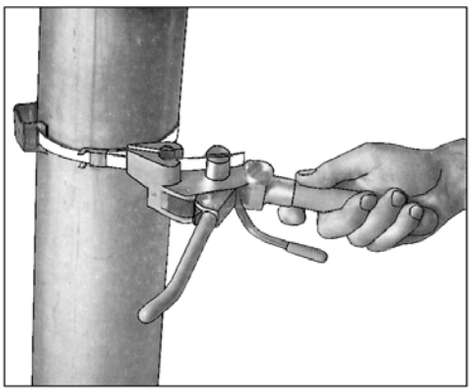

1. With the Bantam Tool in the straight or angle position, place the band in the nose of the tool and with sufficient band in the winding mandrel.

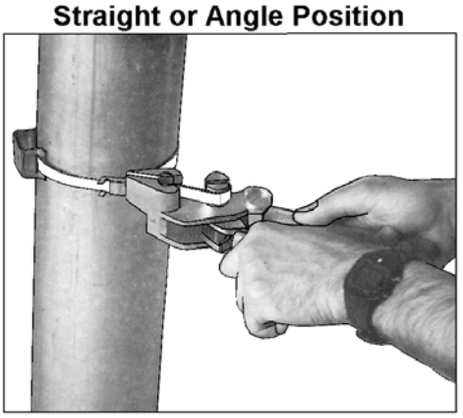

2. Move the ratchet handle back and forth until sufficient tension has been applied.

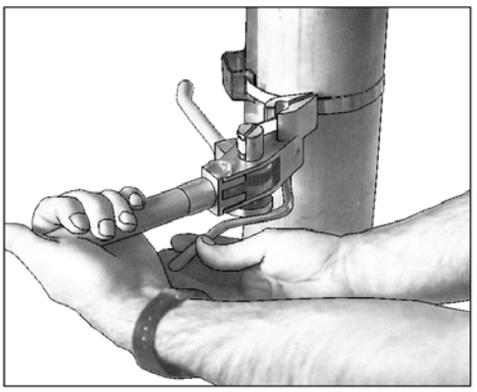

3. Roll tool over to the other side and pull the cutter handle. Remove tool and tap down ears of clip to complete clamp. Remove excess material from winding mandrel.

UES Promura - Product enquiries

+61 3 9547 5833 | sales@uespromura.com.au | uespromura.com.au

10-12 McWilliam Street, Springvale VIC 3171, Australia